


## INSTALLATION INSTRUCTIONS

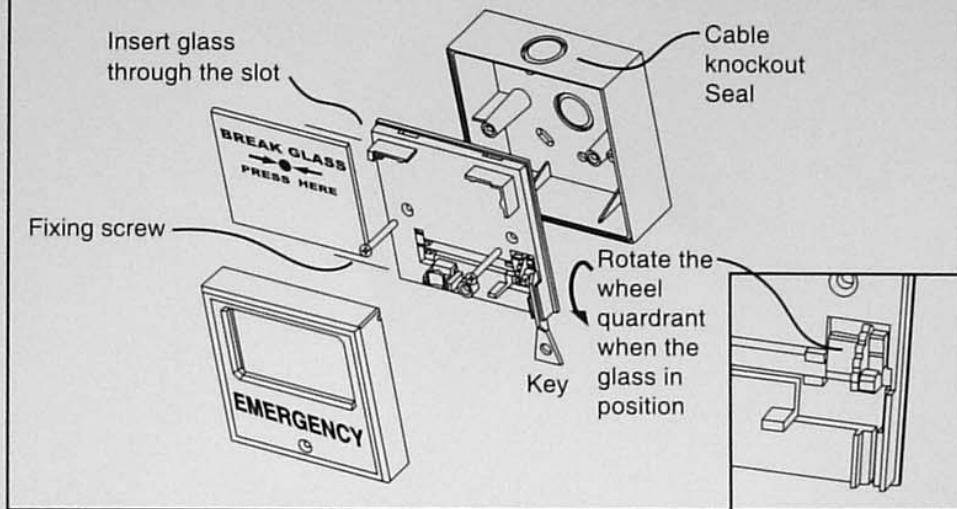

### MODEL : EL-EB4

#### SURFACE FIXING

SURFACE wiring-fix box over flat surface. Secure by tightening two screws evenly down to prevent distortion.

#### CONCEAL FIXING

Lower box into wall with front edge level or slightly below wall surface.

#### CONDUIT HOLES

Cable knockout seal for cable entries 20mm ( $\frac{3}{4}$ " ) are provided on top and bottom.

#### TESTING

Insert and push in the key that provided ( refer to drawing) remove for reset.

#### NORMAL OPERATING METHOD

The system is operated by pressing hard to the glass. A protective label on the glass prevents operator injury.

#### MAINS SYSTEM

Affix voltage warning label to each unit.

#### RATING

250V AC 10A

12/24V DC 10A


48V DC 3A

#### WIRING

Do not connect TWO CORES WITH ONE TERMINAL SCREW.

ALWAYS USE ONE SCREW FOR \*IN\* AND ONE FOR \*OUT\* TO ENSURE GOOD CONTINUITY.

#### CONNECTION INSTRUCTION



1 and 3 - open circuit system

2 and 3 - close circuit system