

elock EM Lock Series

elock-600 Series electromagnetic locks offer cost effective solution with easy installation & suitable for variety of application . It has no moving parts thus keeping maintenance to a minimum.

All types of brackets are available to ease installation for both in-swing & out-swing doors.




elock-600 / elock-600L

- * 600lbs holding force
- * Dual voltage 12 & 24 Vdc
- * Current drawn 500mA / 250mA
- * MOV surge protection
- * Fail-Safe type
- * Unmonitored Model (elock-600) & Monitored Model (elock-600L)
- * Push-off button on armature for instant release
- * Dimension : -

Magnet : 250(L) X 41(W) X 26(D) mm
 Armature Plate : 170(L) X 38(W) X 11(D) mm

* Safety Approval

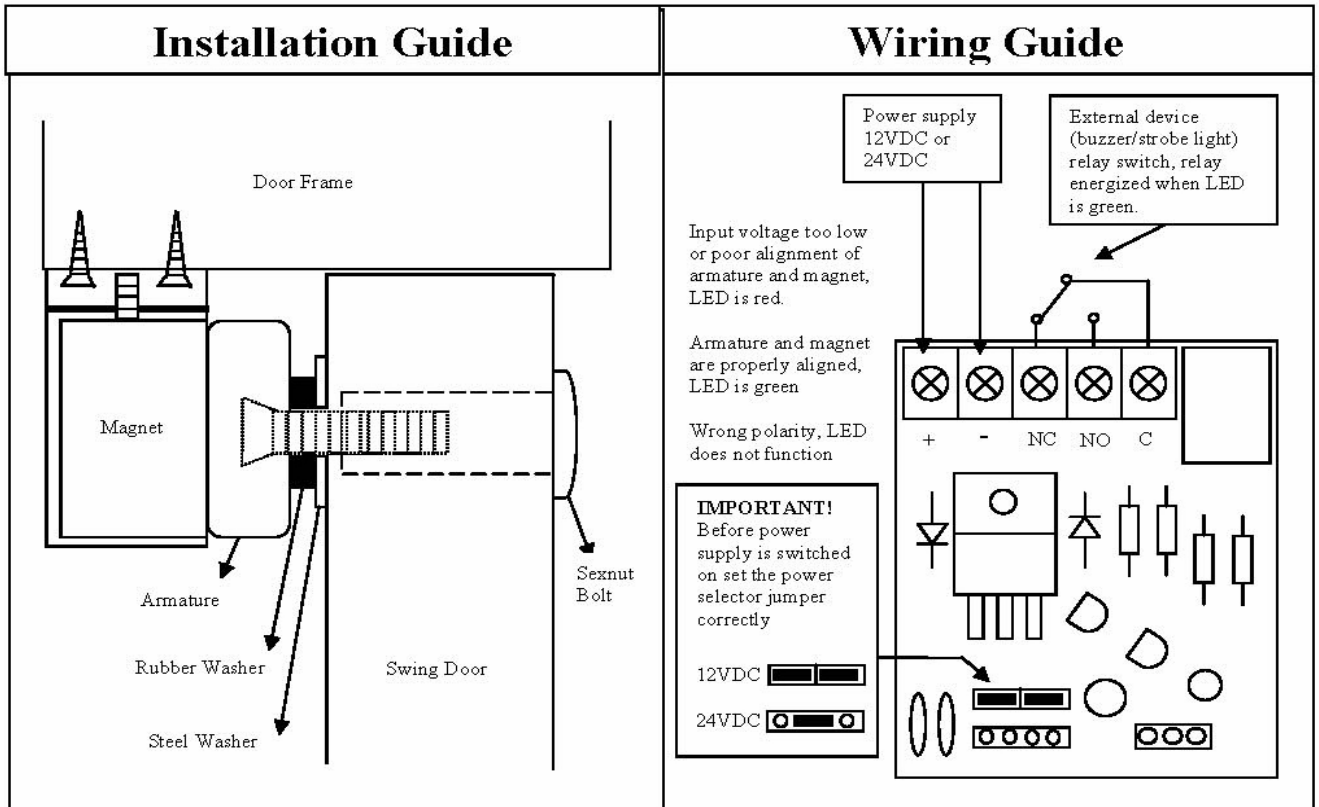

EL-BKL (L Bracket)

- * Adjustable "L" bracket for outward door, when the header is narrow.
- * Available for elock-300, 600 & 1200 Series



EL-BKU (U Bracket)

- * Specially designed for glass door solution
- * Available for elock-300 & 600 Series




EL-BKZ (ZL Bracket)

- * Adjustable "ZL" bracket for inward door application.
- * Available for elock-300, 600 & 1200 Series application.



1. Standard mounting :-

With Filler Plate attached on top of EM Lock.

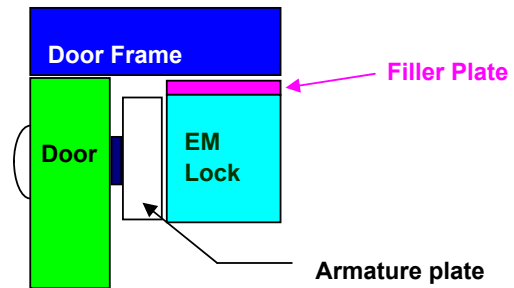


2. L Bracket Mounting :-

Mounting with "Adjustable L Bracket" when Door frame is narrow.

Mounting Procedure :-

Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable L Bracket " set.

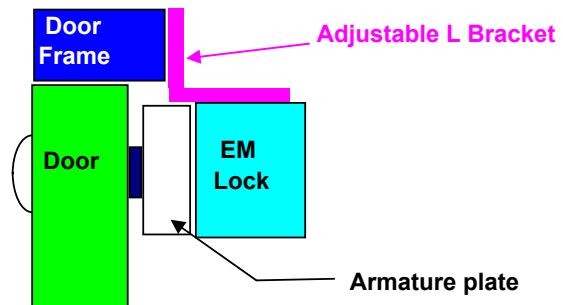

3. ZL Bracket mounting :-

Mounting with " ZL Bracket " for In-swing door application.

Mounting Procedure :-

Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable ZL Bracket " set.

